

DS-KH6320-LE1(B)/White Video Intercom Network Indoor Station



The KH6 series IP indoor station, with 7-inch touch screen, brings you a more fluent and fit operation. You can also view the live view image of the public area, which helps to check the safety of the area and ensure your security. The device is powered by the standard PoE, and is no need to wire extra power supply, which is easy for installation and deployment.

- 7-inch TFT touch screen with 1024 × 600 resolution
- Plug & Play
- Standard PoE power supply
- Live view of the door station and cameras in public areas
- Support multiple languages

▪ Specification

| System parameters | |
|-----------------------------------|---|
| Operating system | Linux |
| ROM | 32 MB |
| RAM | 128 MB |
| CPU | Embedded processor |
| Display parameters | |
| Screen size | 7-inch |
| Operation method | Capactive touch |
| Type | TFT LCD |
| Resolution | 1024 × 600 |
| Video parameters | |
| Lens | / |
| Resolution | / |
| FOV | / |
| WDR | / |
| Video compression standard | / |
| Focal length | / |
| Audio parameters | |
| Audio compression standard | G.711 U, G.711 A |
| Audio input | Built-in omnidirectional microphone |
| Audio output | Built-in loudspeaker |
| Audio compression bitrate | 64 Kbps |
| Audio quality | Noise suppression and echo cancellation |
| Volume adjustment | Adjustable |
| Capacity | |
| Event capacity | 200 captured pictures (with TF card); 200 alarm records 2 MB RAM (without TF card) reserved for events |
| Linked indoor extensions capacity | 16 |
| Linked network camera capacity | 16 |
| Linked doorphone capacity | 17 IP doorphones Max. |
| Network parameters | |
| Communication protocol | TCP/IP, RTSP |
| Wired network | Support |
| Wi-Fi standard | / |
| Bluetooth version | / |
| 3G/4G standard | / |
| Zigbee | / |
| High capacity | / |
| High capacity | / |
| Device interfaces | |
| Alarm input | 8 |
| Network interface | 1 RJ-45 10/100 Mbps self-adaptive |
| TAMPER | / |
| RS-485 | / |
| USB | / |



Tel: +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

| | |
|-------------------------|--|
| TF card | / |
| Alarm output | / |
| Power interface | 1 (12VDC power input) |
| General | |
| Button | / |
| Installation | Surface mounting, table mounting |
| Indicator | / |
| Protective level | / |
| Working temperature | -10 °C to 50 °C (14 °F to 133 °F) |
| Working humidity | 10% to 90% |
| Dimensions | 200 mm × 140 mm × 23.6 mm (7.87" × 5.51" × 0.93") |
| Battery | / |
| Power supply | IEEE802.3af, standard PoE 12 VDC |
| Application environment | Indoor |
| Power consumption | ≤ 3 W |
| Language | English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese (Brazil), Spanish, Hebrew, Romanian, Turkish, Estonian, Danish, Swedish, Norwegian, Finnish, Vietnamese, Croatian, Slovenian, Serbian, Arabic, Portuguese (Portugal), Lithuanian, Uzbek, Kazakh, Mongolian, Ukrainian |
| Weight | Without package: 330 g (0.73 lb), With package: 667g (1.47 lb) |

▪ Available Model

DS-KH6320-LE1(B)/White

Headquarters


No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



▪ **Dimension**

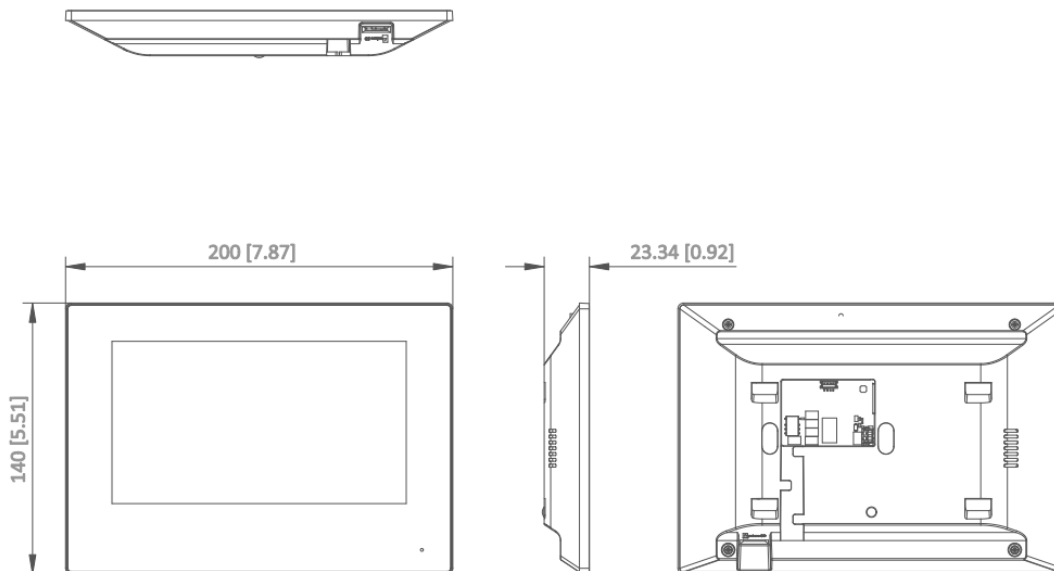

Unit:mm [inch]

| | |
|-------|-----|
| SCALE | 1:1 |
|-------|-----|

▪ **Accessory**

▪ **Optional**

**DS-KAW50-1
50W 12V Power
Adapter**



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

