

# DS-KH6320Y-WTE2/WHITE

**Hikvision**



- Hikvision
- TFT screen for video intercom from 7" to 2 wires
- Built-in microphone and speaker
- Bidirectional audio
- 8 alarm inputs
- 2 relay outputs
- MicroSD slot
- Image capture and recording
- Multiple screen extensions
- TCP/IP connection via DS-KAD70xY and WiFi
- Internal calls between devices
- Surface mounting
- Push notifications through Hik-Connect app
- White colour


## Features

- Video door entry monitor
- 7" TFT Screen
- Bidirectional audio
- 2 wires, WiFi, SIP
- MicroSD card slot up to 128 GB
- Surface mounted : White

## Specs

**Brand**  
**Model**  
**Operating system**

Hikvision  
DS-KH6320Y-WTE2/White  
Linux

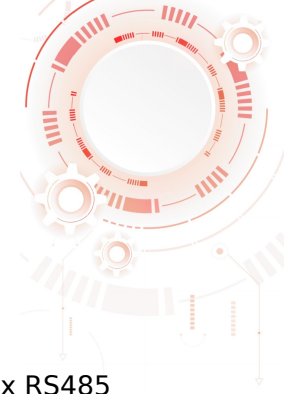

<b>LCD</b>	7" color touch-screen TFT
<b>Screen resolution</b>	1024 x 600
<b>Inputs</b>	8 x configurable alarm inputs, 1 x RS485
<b>Outputs</b>	2 x relay outputs
<b>Audio</b>	Two-way audio with integrated microphone and loudspeaker Noise reduction and echo cancellation
<b>Memory</b>	MicroSD card slot (up to 128 GB)
<b>Connection</b>	2 wires / RTSP / SIP Protocol 2.0 / WiFi 802.11b/g/n (only for connection to app via P2P))
<b>Remote access</b>	Software iVMS-4200 Hik-Connect mobile application
<b>Power</b>	Through specific Hikvision hub for video intercoms of 2 wires (6 W max)
<b>Temp. operation</b>	-10° C ~ +50° C
<b>Dimensions</b>	140 (H) x 200 (W) x 15 (D) mm
<b>Weight</b>	327 g
<b>Colour</b>	White
<b>Slave monitors</b>	It is not possible to use the Android DS-KH9310 and DS-KH9510 monitors as slaves

## Package content

- Hikvision indoor video intercom monitor
- Installation material
- User instructions