

NZM 0002 A Notification Appliance Zone Module

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Monitored control of signaling devices by voltage polarity reversal
- ▶ Ready to go thanks to plug-and-play technology and pluggable terminal blocks


The NZM 0002 A Notification Appliance Zone Module provides two monitored primary lines. This enables the connection of two separate notification appliance zone lines.

Connection of:

- Sirens
- Strobes
- Horns

The operating status of each zone is shown by a red and a yellow status LED.

System Overview

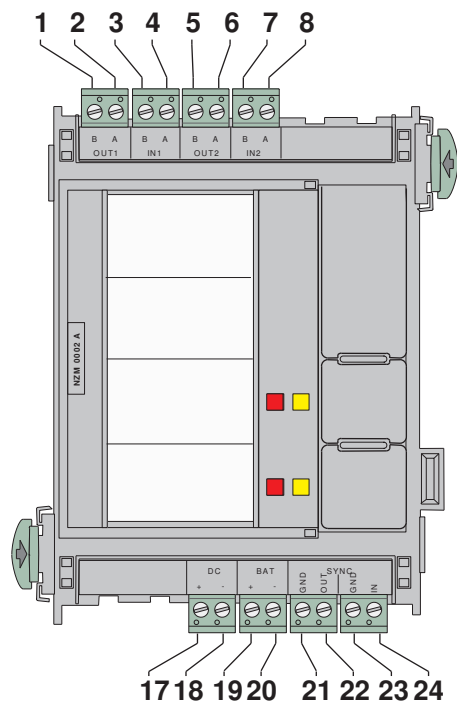

Pos.	Description	Connector
1 / 2	B OUT1/A OUT1	NAC zone 1
3 / 4	B IN1/A IN1	
5 / 6	B OUT2/A OUT2	NAC zone 2
7 / 8	B IN2/A IN2	
17 / 18	DC + / -	External power supply
19 / 20	BAT + / -	24 V DC input, battery voltage
21 / 22	SYNC GND/OUT	Synchronization output
23 / 24	SYNC GND/IN	Synchronization input

Installation/Configuration Notes

- For operating the fire alarm system according to EN 54-13 the signaling device lines must be designed in loop topology.

Parts Included

Qty.	Components
1	NZM 0002 A Notification Appliance Zone Module
2	Labelling strips
2	3.9 kOhm resistors

Technical Specifications

Electrical

Input voltage	20 V DC to 30 V DC 5 V DC \pm 5 %
Max. current consumption	
• Standby (2 zones)	40 mA (at 24 V DC)
• Alarm (2 zones)	65 mA (at 24 V DC)
Max. output voltage	29.5 V DC
Max. output current for	
• Power supply via rail	500 mA per notification appliance zone line (in the event of an alarm)
• External power supply	3 A per notification appliance zone line (in the event of an alarm)
• Max. cable length	Dependent on type and number of connected signaling devices

Mechanics

Operating/display elements	4 LEDs (2 x red, 2 x yellow) 2 keys (LED test)
Housing material	ABS plastic, Polylac PA-766
Housing color	Satin finish, anthracite, RAL 7016
Dimensions	Approx. 127 x 96 x 60 mm
Weight	Approx. 135 g

Environmental conditions

Permitted operating temperature	-5 °C to 50 °C
Permitted storage temperature	-20 °C to 60 °C
Permitted relative humidity	95 %, non-condensing
Protection class as per IEC 60529	IP 30

Ordering Information

NZM 0002 A Notification Appliance Zone Module
for connecting 2 separate notification appliance zone lines, provides 2 monitored primary lines
Order number **NZM 0002 A**

Accessories

NMC 0000 A Cable HPD/NZM
Used for synchronization in accordance with UL requirements, cable length 90 cm
Order number **NMC 0000 A**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
al.securitysystems@bosch.com
www.boschsecurity.com